

1. Description


1.1. Project

| | |
|-----------------|--------------------|
| Project Name | epd-demo |
| Board Name | epd5in83-demo |
| Generated with: | STM32CubeMX 4.26.0 |
| Date | 11/17/2018 |

1.2. MCU

| | |
|----------------|---------------|
| MCU Series | STM32F1 |
| MCU Line | STM32F103 |
| MCU name | STM32F103ZETx |
| MCU Package | LQFP144 |
| MCU Pin number | 144 |

2. Pinout Configuration

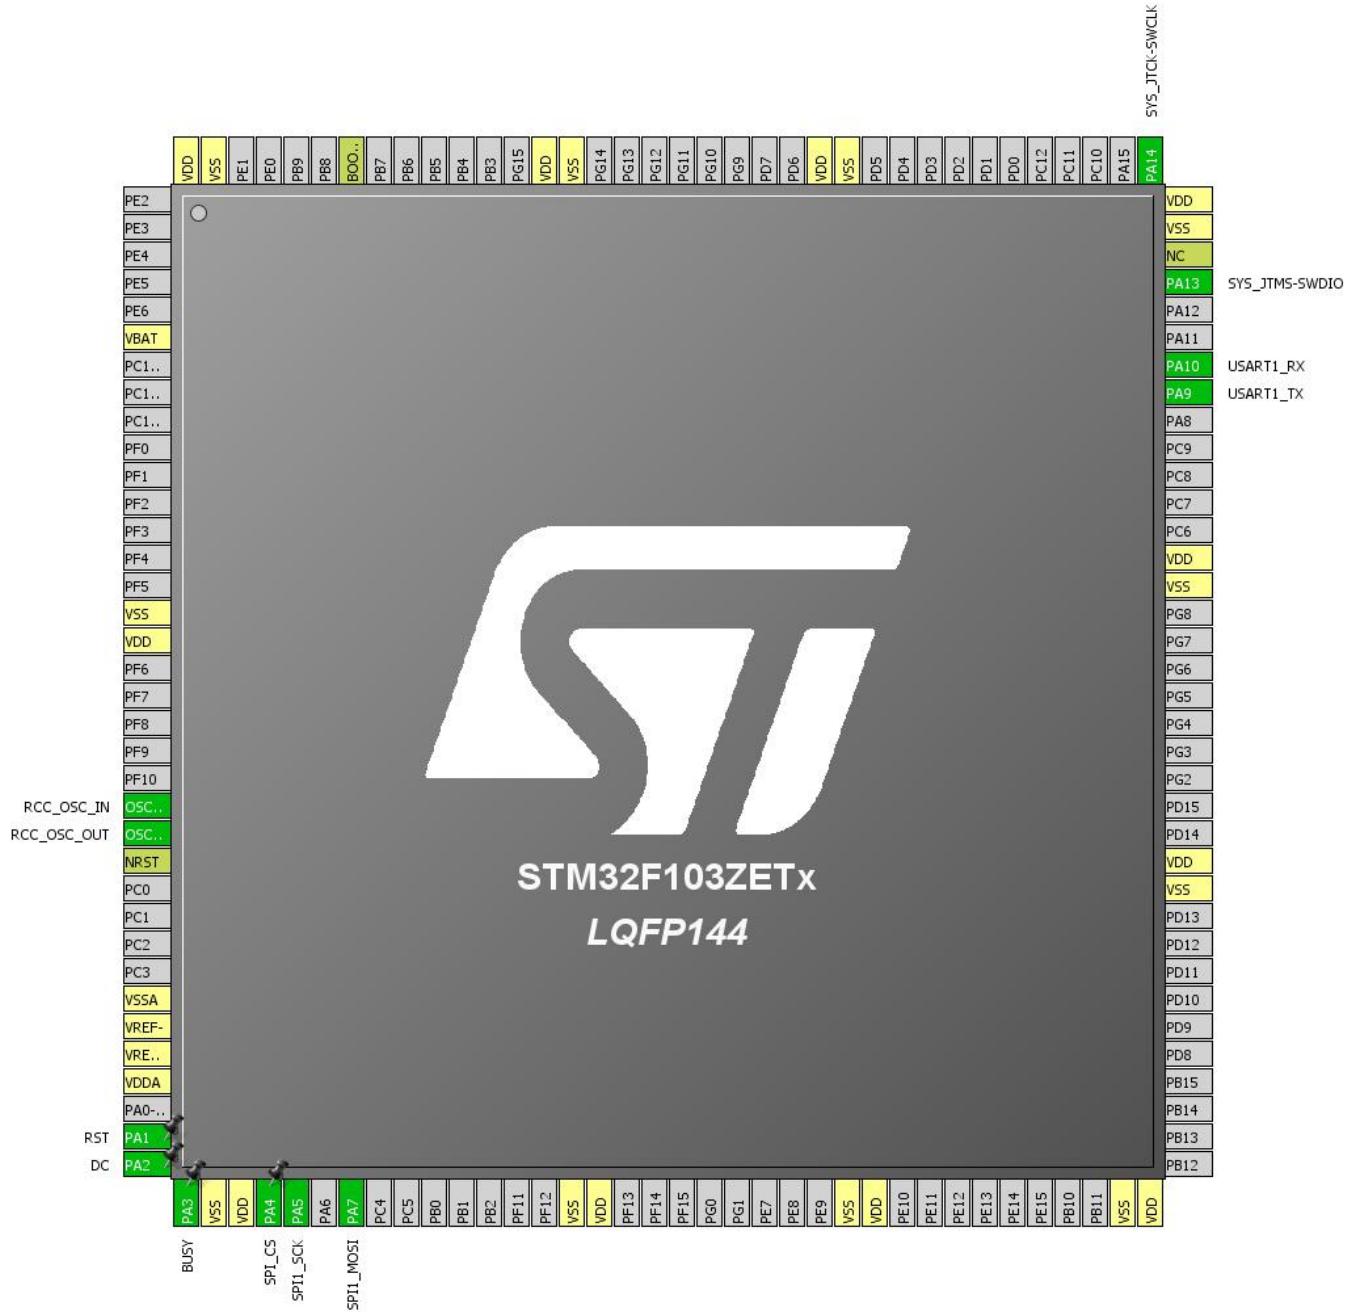

3. Pins Configuration


| Pin Number LQFP144 | Pin Name (function after reset) | Pin Type | Alternate Function(s) | Label |
|-----------------------|---------------------------------------|----------|--------------------------|--------|
| 6 | VBAT | Power | | |
| 16 | VSS | Power | | |
| 17 | VDD | Power | | |
| 23 | OSC_IN | I/O | RCC_OSC_IN | |
| 24 | OSC_OUT | I/O | RCC_OSC_OUT | |
| 25 | NRST | Reset | | |
| 30 | VSSA | Power | | |
| 31 | VREF- | Power | | |
| 32 | VREF+ | Power | | |
| 33 | VDDA | Power | | |
| 35 | PA1 * | I/O | GPIO_Output | RST |
| 36 | PA2 * | I/O | GPIO_Output | DC |
| 37 | PA3 * | I/O | GPIO_Input | BUSY |
| 38 | VSS | Power | | |
| 39 | VDD | Power | | |
| 40 | PA4 * | I/O | GPIO_Output | SPI_CS |
| 41 | PA5 | I/O | SPI1_SCK | |
| 43 | PA7 | I/O | SPI1_MOSI | |
| 51 | VSS | Power | | |
| 52 | VDD | Power | | |
| 61 | VSS | Power | | |
| 62 | VDD | Power | | |
| 71 | VSS | Power | | |
| 72 | VDD | Power | | |
| 83 | VSS | Power | | |
| 84 | VDD | Power | | |
| 94 | VSS | Power | | |
| 95 | VDD | Power | | |
| 101 | PA9 | I/O | USART1_TX | |
| 102 | PA10 | I/O | USART1_RX | |
| 105 | PA13 | I/O | SYS_JTMS-SWDIO | |
| 106 | NC | NC | | |
| 107 | VSS | Power | | |
| 108 | VDD | Power | | |
| 109 | PA14 | I/O | SYS_JTCK-SWCLK | |
| 120 | VSS | Power | | |

epd-demo Project
Configuration Report

| Pin Number LQFP144 | Pin Name (function after reset) | Pin Type | Alternate Function(s) | Label |
|-----------------------|---------------------------------------|----------|--------------------------|-------|
| 121 | VDD | Power | | |
| 130 | VSS | Power | | |
| 131 | VDD | Power | | |
| 138 | BOOT0 | Boot | | |
| 143 | VSS | Power | | |
| 144 | VDD | Power | | |

* The pin is affected with an I/O function

4. Clock Tree Configuration

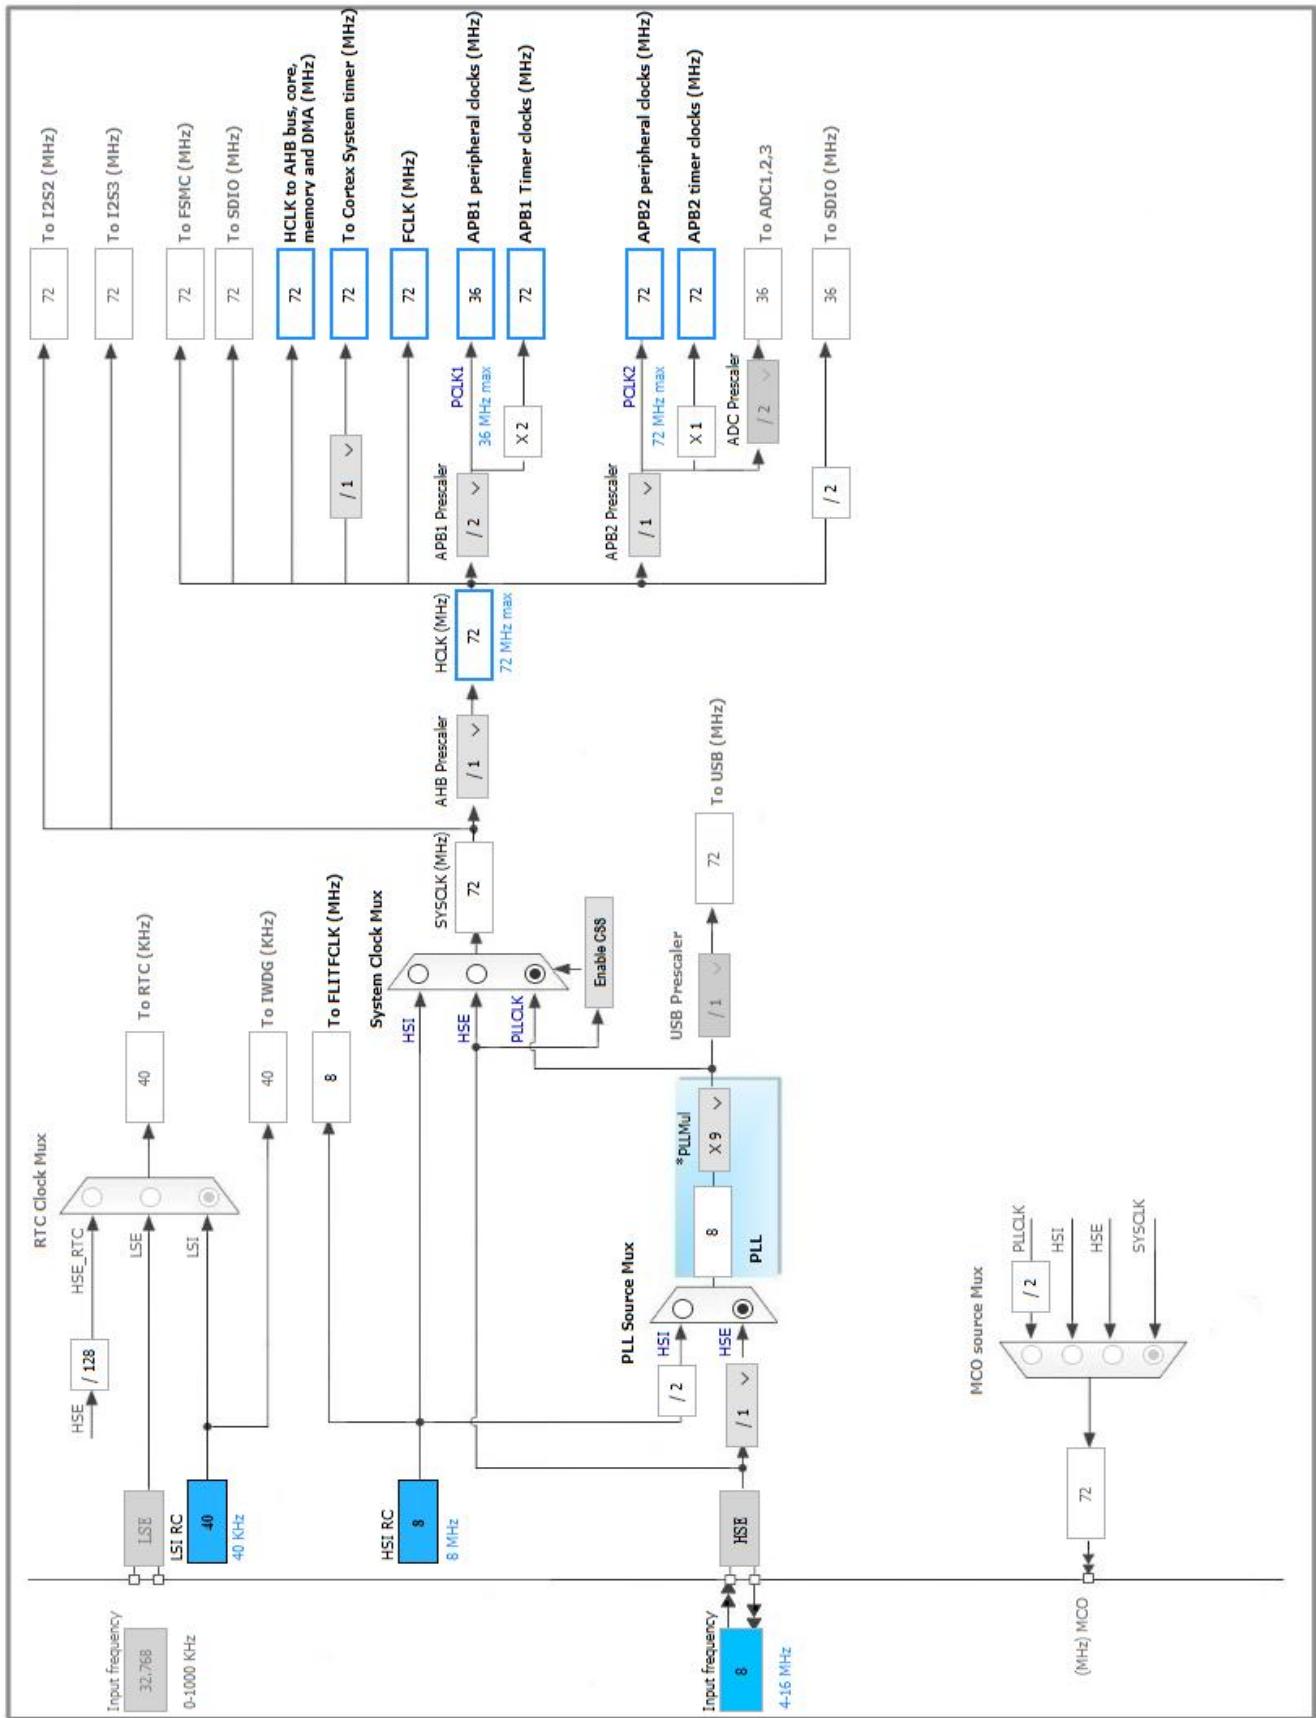

5. IPs and Middleware Configuration

5.1. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

5.1.1. Parameter Settings:

System Parameters:

| | |
|-------------------|--------------------|
| VDD voltage (V) | 3.3 |
| Prefetch Buffer | Enabled |
| Flash Latency(WS) | 2 WS (3 CPU cycle) |

RCC Parameters:

| | |
|--------------------------------|------|
| HSI Calibration Value | 16 |
| HSE Startup Timeout Value (ms) | 100 |
| LSE Startup Timeout Value (ms) | 5000 |

5.2. SPI1

Mode: Transmit Only Master

5.2.1. Parameter Settings:

Basic Parameters:

| | |
|--------------|-----------|
| Frame Format | Motorola |
| Data Size | 8 Bits |
| First Bit | MSB First |

Clock Parameters:

| | |
|---------------------------|------------------------|
| Prescaler (for Baud Rate) | 64 * |
| Baud Rate | 1.125 MBits/s * |
| Clock Polarity (CPOL) | Low |
| Clock Phase (CPHA) | 1 Edge |

Advanced Parameters:

| | |
|-----------------|----------|
| CRC Calculation | Disabled |
| NSS Signal Type | Software |

5.3. SYS

Debug: Serial Wire

Timebase Source: SysTick

5.4. USART1

Mode: Asynchronous

5.4.1. Parameter Settings:

Basic Parameters:

| | |
|-------------|---------------------------|
| Baud Rate | 115200 |
| Word Length | 8 Bits (including Parity) |
| Parity | None |
| Stop Bits | 1 |

Advanced Parameters:

| | |
|----------------|----------------------|
| Data Direction | Receive and Transmit |
| Over Sampling | 16 Samples |

* User modified value

6. System Configuration

6.1. GPIO configuration

| IP | Pin | Signal | GPIO mode | GPIO pull/up pull down | Max Speed | User Label |
|--------|---------|----------------|------------------------------|-----------------------------|-----------|------------|
| RCC | OSC_IN | RCC_OSC_IN | n/a | n/a | n/a | |
| | OSC_OUT | RCC_OSC_OUT | n/a | n/a | n/a | |
| SPI1 | PA5 | SPI1_SCK | Alternate Function Push Pull | n/a | High * | |
| | PA7 | SPI1_MOSI | Alternate Function Push Pull | n/a | High * | |
| SYS | PA13 | SYS_JTMS-SWDIO | n/a | n/a | n/a | |
| | PA14 | SYS_JTCK-SWCLK | n/a | n/a | n/a | |
| USART1 | PA9 | USART1_TX | Alternate Function Push Pull | n/a | High * | |
| | PA10 | USART1_RX | Input mode | No pull-up and no pull-down | n/a | |
| GPIO | PA1 | GPIO_Output | Output Push Pull | n/a | Low | RST |
| | PA2 | GPIO_Output | Output Push Pull | n/a | Low | DC |
| | PA3 | GPIO_Input | Input mode | No pull-up and no pull-down | n/a | BUSY |
| | PA4 | GPIO_Output | Output Push Pull | n/a | Low | SPI_CS |

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

| Interrupt Table | Enable | Preenemption Priority | SubPriority |
|---|--------|-----------------------|-------------|
| Non maskable interrupt | true | 0 | 0 |
| Hard fault interrupt | true | 0 | 0 |
| Memory management fault | true | 0 | 0 |
| Prefetch fault, memory access fault | true | 0 | 0 |
| Undefined instruction or illegal state | true | 0 | 0 |
| System service call via SWI instruction | true | 0 | 0 |
| Debug monitor | true | 0 | 0 |
| Pendable request for system service | true | 0 | 0 |
| System tick timer | true | 0 | 0 |
| PVD interrupt through EXTI line 16 | | unused | |
| Flash global interrupt | | unused | |
| RCC global interrupt | | unused | |
| SPI1 global interrupt | | unused | |
| USART1 global interrupt | | unused | |

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

| | |
|-----------|---------------|
| Series | STM32F1 |
| Line | STM32F103 |
| MCU | STM32F103ZETx |
| Datasheet | 14611_Rev12 |

7.2. Parameter Selection

| | |
|-------------|-----|
| Temperature | 25 |
| Vdd | 3.3 |

8. Software Project

8.1. Project Settings

| Name | Value |
|-----------------------------------|---|
| Project Name | epd-demo |
| Project Folder | G:\e-Paper\code\20181024\1.54inch_e-paper_code\STM32\STM32-F103ZET6 |
| Toolchain / IDE | MDK-ARM V5 |
| Firmware Package Name and Version | STM32Cube FW_F1 V1.6.1 |

8.2. Code Generation Settings

| Name | Value |
|---|---|
| STM32Cube Firmware Library Package | Copy all used libraries into the project folder |
| Generate peripheral initialization as a pair of '.c/.h' files | No |
| Backup previously generated files when re-generating | No |
| Delete previously generated files when not re-generated | Yes |
| Set all free pins as analog (to optimize the power consumption) | No |

9. Software Pack Report